



EXPAND NAIL

Material: PE
Color: White or other colors.

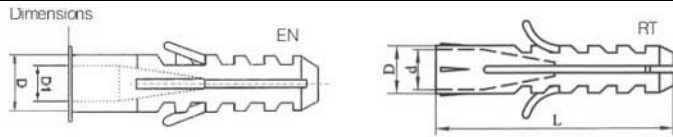

Item No.	Size(mm)			Packing(Pcs/bag)	
	L(mm)	D(mm)	D1(mm)		
EN-06	29.8	6.0	4.9	100	1000
EN-08	38.6	7.9	5.3	100	1000
EN-10	42.7	9.9	5.8	100	500
EN-12	47.9	11.6	6.3	100	500
RT-07	35.0	7.0	5.7	100	1000
RT-08	40.0	8.0	6.7	100	1000
RT-10	50.0	10.0	8.5	100	500
RT-12	60.0	12.0	10.4	100	500




Item No.	H	H1	W	L	L1	L2	Packing
FEN-8	37	6.3	10	12.7	9.7	12.5	100pcs

Spiral Wrapping Bands

Material: made from PE.
Usage: fix one end with safety belt first, then circle the wires clockwise to make them tighten.
Application: a protection wear for electric wires, and make them insulation and look nice.



Item No.	d (mm)	D(mm)	W(mm)	Wrapping Range (mm)	Packing
SWB-06	4	6	7.0	4-50	10M/Roll
SWB-08	6	8	10.8	6-60	
SWB-10	7.5	10	11.4	7.5-60	
SWB-12	9	12	13.9	9-65	
SWB-15	12	15	15.0	12-75	
SWB-19	15	19	18.2	15-100	
SWB-24	20	24	19.6	20-130	

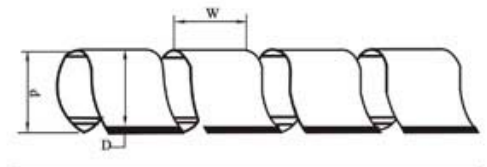

R type cable clamps




● Material: Nylon6694V2 agreed by UL.
● Usage: put cable in, fix by screw.

ITEM NO.	A(mm)	B(mm)	C		D(mm)	PACKING
			MM	INCH		
S-1/8R	9.5	9.6	3.2	1/8"	19.8	100PCS
S-3/16R	9.5	9.6	4.8	3/16"	19.8	
S-1/4R	12.0	10.0	6.35	1/4"	22.0	
S-5/16R	12.0	10.0	7.9	5/16"	22.0	
S-3/8R	12.5	12.0	9.5	3/8"	24.0	
S-1/2R	15.2	12.0	12.7	1/2"	31.0	
S-5/8R	18.2	12.0	15.8	5/8"	34.3	
S-3/4R	18.2	12.0	19.4	3/4"	35.0	
S-1R	22.0	12.0	25.4	1"	43.0	
S-17/16R	24.0	12.0	27.5	17/16"	50.0	
S-5/4R	26.2	12.0	31.8	11/4"	46.2	
S-3/2R	30.0	12.0	36.7	11/2"	50.0	

Self-adhesive Tie Mounts

Material: Nylon 66, 94V-2, certified by UL, the back attached sponge glue imported.
Usage: Peel the sponge glue and stick on the wall then, bundle the wire with cable ties.
Application: for bundling wires and other things save time and convenient, used for the wall which can't be made a hole in.


Item No.	L×W	H (mm)	T(mm)	Screw Hole(mm)
TM-20	20×20	6.1	5.0	2.9
TM-25	25×25	7.5	6.2	3.5
TM-30	30×30	8.7	6.4	4.5
TM-40	40×40	6.4	10.8	/
AAM-1	19×19	4.6	4.4	/
AAM-2	28×28	6.4	5.4	5.5

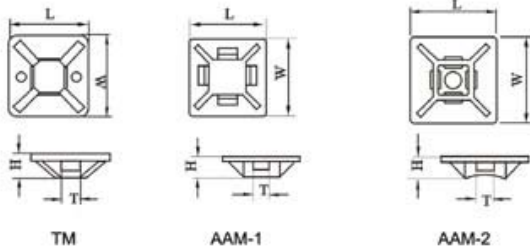

Self-adhesive Tie Mounts

Material: Nylon 66, (C-1;C-2), certified by UL, high grade steel or stainless steel ; sponge double side sticker.
Usage: remove the sticker protect paper, stick the clip on the wall, then put the wire through the clip..
Application: convenient for use, it is especial suit for the no-holes of wall.

Item No.	L×W	Material	Sponge
C-1	17×12	PA66	3M
C-2	20×14	PA66	3M
CB-3	20×10	stainless steel or steel	3M
CB-4	25×15		3M
CB-5	30×20		3M

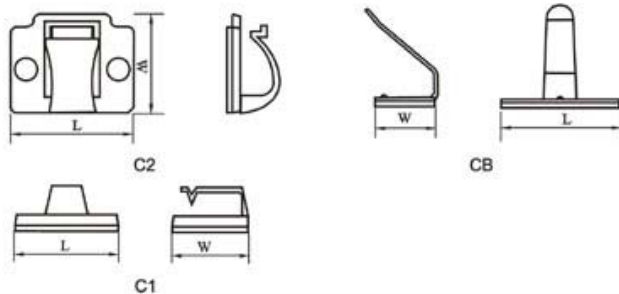

bus-bar insulations



SM-14



SM-24



SM-25



SM-30



SM-35



SM-40



SM-51



SM-76



Values	Style					
	SM-25	SM-30	SM-35	SM-40	SM-51	SM-76
Tensile strength(lbs)	500	550	600	650	1000	1500
Torgue strength (ft lbs)	6	8	10	10	20	40
Voltage withstand(kv)	6	8	10	12	15	25
Screw(mm)	6	8	8	8	8	10
Weight(g)	28	44	50	56	83	233

PVC Electrical Insulation Tapes



Material:made of Polyvinyl chloride(PVC)as the backing material, coated with rubber-based pressure sensitive adhesive.

Usage: insulating protection of electrical parts and wires. Widely used for manufacturing of automobile harness, household electrical equipment.

Size:

0.13mm×19mm×10yds	0.15mm×19mm×10m
0.13mm×19mm×10m	0.15mm×19mm×20m
0.13mm×19mm×20m	0.15mm×15mm×10m
0.15mm×19mm×10yds	0.15mm×50mm×20m
0.15mm×19mm×20yds	0.18mm×19mm×10m
	0.18mm×3/4" ×60Ft

Product Description	PVC Electrical Insulation Tape(Flame Resistant)
Backing	Polyvinyl Chloride(PVC)film
Adhesive	Rubber based
Adhesion to steel(N/cm)	≥1.5
Tensile Strength(N/cm)	≥15
Elongation(%)	≥150
Voltage Breakdown(kV)	≥5
Thickness(mm)	0.13, 0.15, 0.18
Length	5m,10m,20m,30m,10yds,20yds,60ft
Temperature(°C)	80°C

