


MG Cable Glands

Threaded entry: Metric


Color: Black and grey

Operating temperature: -40°C—100°C, and can also endure 120°C instantly.

Protection: IP 68

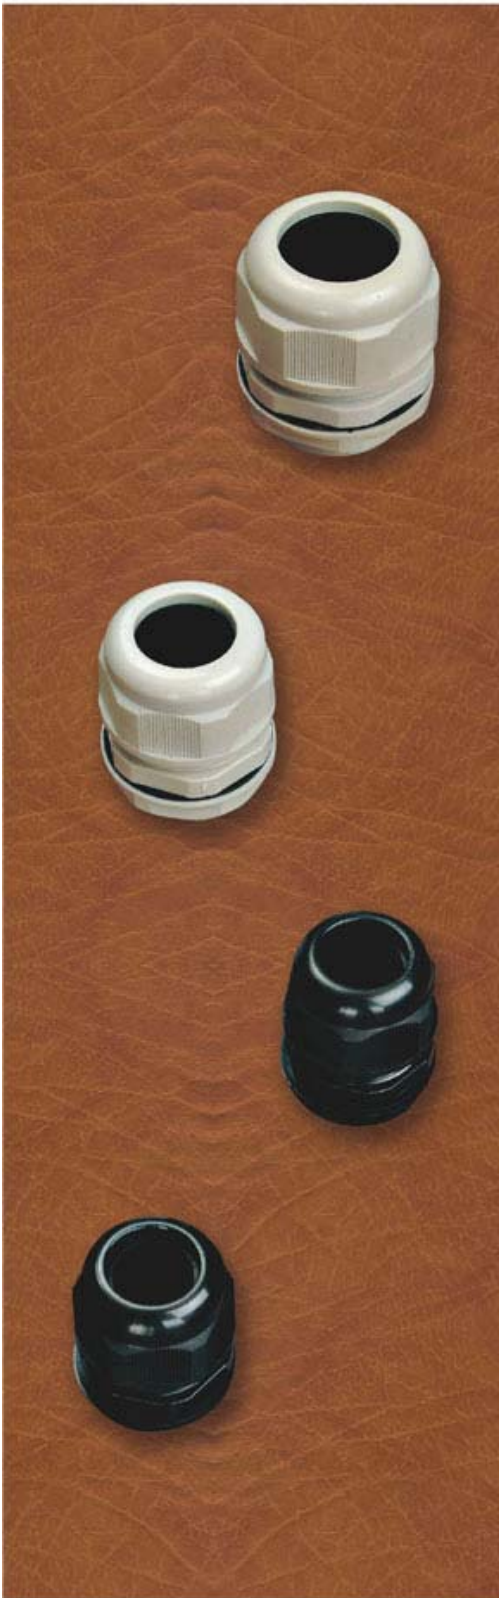

Item No.		Threaded entry metric	Cable range ϕ	Thread O.D. C1	Panel mounting Hole	Thread length C2	Sealing nut size F	Lock nut size A
Black	Grey							
MG12-08B	MG12-08G	M12x1.25	7.6~4.6	12	12.5	8.5	19	18
MG16-10B	MG12-10G	M16x1.5	10~6	16	16.5	15	22	22
MG20-14B	MG12-14G	M20x1.5	14~9	20	20.5	15	27	27
MG25-18B	MG25-18G	M25x1.5	18~13	25	25.5	15	33	33
MG32-25B	MG32-25G	M32x1.5	25~18	32	33	15	41	41
MG40-30B	MG40-30G	M40x1.5	30~24	40	41	20	50	50
MG50-39B	MG50-39G	M50x1.5	39~30	50	51	22	62	61
MG63-49B	MG63-49G	M63x1.5	48.5~40	63	64	25	75	75

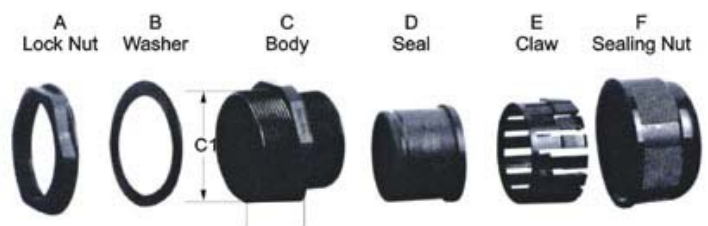

PG Cable Glands

Material: made from UL Nylon 66, 94V-2 and tight ring from rubber.


Feature:

Special designation, good strength and none damage to electrical machine.

Not need to dismetgrate the fix terminal, cable can be inserted through directly then tighten easy and save time.

Application: used for machinery control box, distribution plate, machine and electrical, etc.

Item No.	D1	D2	L1	L2	L3	B1	Cable range
PG-7	10.9	8.1	10.4	14.5	10.5	6.4	3.5-6
PG-9	15.3	12.2	9.9	15.8	17.2	8.6	4-8
PG-11	17.9	14.6	10.6	15.5	17.5	10.7	5-10
PG-13.5	20.2	16.2	10.3	17.8	17.9	13.3	6-12
PG-16	21.3	18.3	11.2	18.5	20.5	14.3	10-14
PG-19	24.7	20.5	11.4	18.6	21.8	15.5	12-15
PG-21	26.9	21.8	11.6	18.7	23.1	16.7	13-18
PG-25	29.8	25.0	12.1	28.3	24.1	19.2	15-22
PG-29	35.1	29.8	12.4	22.6	24.8	24.8	18-25
PG-36	44.7	37.1	12.6	25.1	26.10	30.7	22-32
PG-42	50.4	43.3	17.3	25.9	30.5	35.6	30-38
PG-48	56.1	48.2	20.9	28.1	31.5	41.4	34-44
PG-63	71	63.5	27.5	31.5	43.5	55	42-54

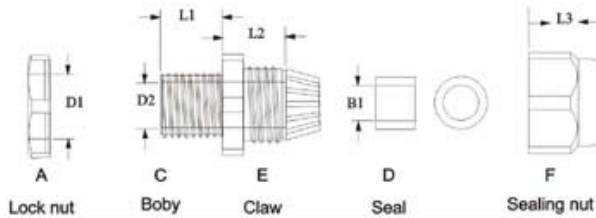

PG-N Cable Glands

