

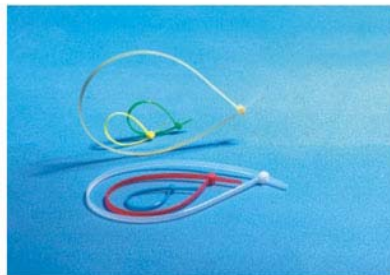


### NYLON CABLE TIE

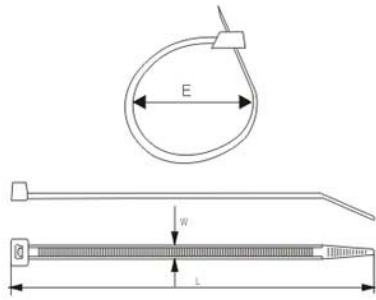


- **Material:** Nylon 66, 94V-2 certified by UL, fire resisting Acid & erosion control, insulate well and not apt to age.
- **Operating temperature:** -35°C to 85°C.
- **Color:** Natural (or white, standard color), UV black and other colors are available upon requested.


Item No.	L		W (mm)	Bundle Diameter (mm)	Tensile Strength			
	Inch	mm			LBS	KGS		
2.5 × 60	2.4"	60	2.5	2-11	18	8		
2.5 × 80	3.2"	80		2-16				
2.5 × 100	4.0"	100		2-22				
2.5 × 120	4.7"	120		2-30				
2.5 × 150	6.0"	150		2-35				
2.5 × 160	6.3"	160		2-40				
2.5 × 200	8.0"	200		3-50				
3.5 × 140	5.5"	140	3.6	3-33	40	18		
3.5 × 150	6.0"	150		3-35				
3.5 × 180	7.1"	180		3-42				
3.5 × 200	8.0"	200		3-50				
3.5 × 250	10"	250		3-65				
3.5 × 280	11"	280		3-70				
3.5 × 300	12"	300		3-80				
3.5 × 370	14.6"	370	3-105					
4.8 × 120	4.7"	120	4.8	3-30	50	22		
4.8 × 160	6.3"	160		3-40				
4.8 × 180	7.1"	180		3-42				
4.8 × 190	7.5"	190		3-46				
4.8 × 200	8.0"	200		3-50				
4.8 × 250	10"	250		3-60				
4.8 × 280	11"	280		3-70				
4.8 × 300	12"	300		3-80				
4.8 × 350	14"	350		3-90				
4.8 × 360	14.2"	360		3-94				
4.8 × 370	14.6"	370		3-98				
4.8 × 380	15"	380		3-102				
4.8 × 400	16"	400		3-105				
4.8 × 430	16.9"	430		3-120				
4.8 × 450	17.7"	450		3-130				
4.8 × 500	19.7"	500	3-150					
7.2 × 150	6.0"	150	7.2	3-35	120	55		
7.2 × 200	8.0"	200		3-50				
7.2 × 250	10"	250		4-65				
7.2 × 300	12"	300		4-80				
7.6 × 350	14"	350	7.6	4-90	120	55		
7.6 × 400	16"	400		4-105				
7.6 × 450	18"	450		4-110				
7.6 × 500	20"	500		4-150				
7.6 × 530	20.9"	530		4-160				
7.6 × 550	21.6"	550		4-165				
9.0 × 400	16"	400		8-105			175	79.4
9.0 × 450	18"	450		8-118				
9.0 × 500	20"	500	8-150					
9.0 × 550	21.6"	550	8-160					
9.0 × 600	23.6"	600	8-170					
9.0 × 650	25.6"	650	8-185					
9.0 × 720	28.3"	720	10-195					
9.0 × 800	31.5"	800	10-230					
9.0 × 900	35.5"	900	10-265	12	250	114		
9.0 × 1020	29.4"	1020	10-300					
9.0 × 1100	43.3"	1100	10-335					
9.0 × 1200	47.2"	1200	10-370					
12 × 650	26.5"	650	14-185					
12 × 900	25.5"	900	14-265					

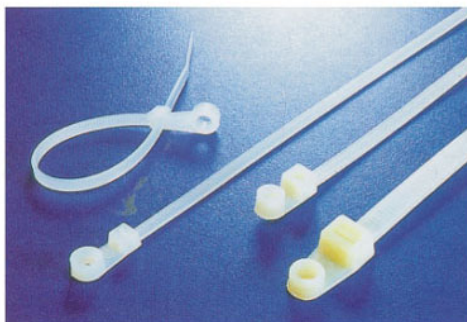

### MONATABLE HEAD TIE


Item No.	L		W(mm)	Max bundle Dia.(mm)	Tensile Strength	
	Inch	mm			LBS	KGS
110MT	4 1/3"	110	3.0	22	18	8.0
150MT	6"	130	3.6	32	30	13.6
200MT	8"	200	4.3	42	40	18



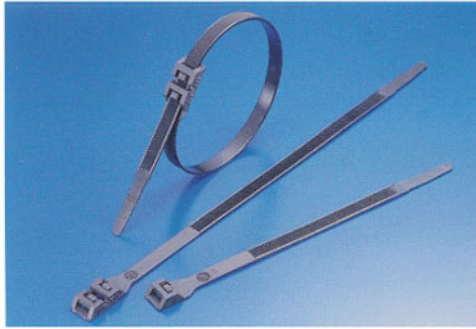

**DOUBLE LOCK CABLE TIE**

Item No.	L		W(mm)	Max.bundle Dia.(mm)	Tensile Strength	
	Inch	mm			LBS	KGS
115DL	5 1/8"	115	6.0	22	7.7	35
180DL	7"	180	6.0	45	7.7	35
180DDL	7"	180	9.0	45	8.8	40
260DL	10 1/4"	260	9.0	66	110	50
350DL	13 5/8"	350	9.0	90	110	50





**KNOT TIE(BALL TYPE)**

Item No.	L		Max.bundle Dia.(mm)	Tensile Strength	
	Inch	mm		LBS	KGS
120KT	5 3/4"	120	25	18	8
150KT	6"	150	35	18	8
180KT	7"	180	45	18	8



**STAINLESS STEEL CABLE TIES (FOR ON BOARD SHIPS & OFFSHORE UNITS)**

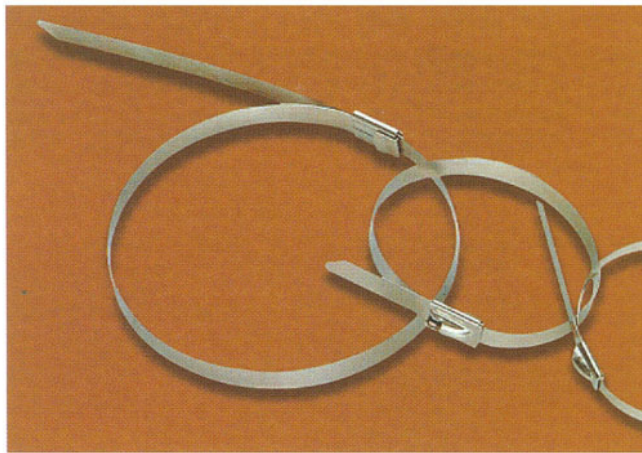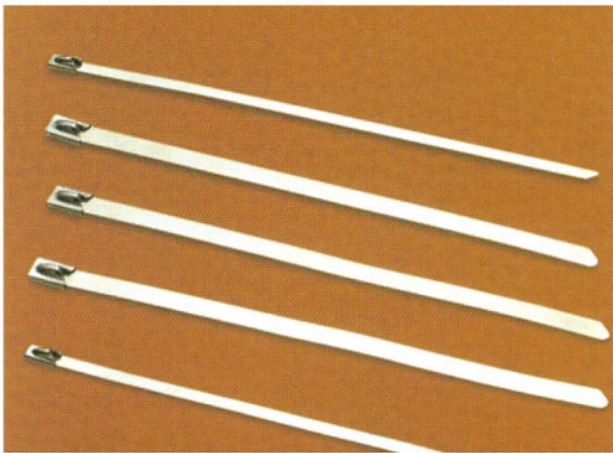

Item No.	L(mm)	W(mm)	Max.bundle Dia.(mm)	Tensile Strength		Stainless Steel Type
				LBS	KGS	
SST-152	152	4.6	35	100	46	AISI.304
SST-200	200	4.6	50	100	46	
SST-300	300	4.6	80	100	46	
SST-360	360	4.6	95	100	46	
SST-520	520	4.6	150	100	46	
SST-680	680	4.6	195	100	46	
SST-840	840	4.6	250	100	46	
SST-1050	1050	4.6	285	100	46	
SST-152	152	7.9	35	250	114	
SST-200	200	7.9	50	250	114	
SST-300	300	7.9	80	250	114	
SST-360	360	7.9	95	250	114	
SST-520	520	7.9	150	250	114	
SST-680	680	7.9	195	250	114	
SST-840	840	7.9	250	250	114	
SST-1050	1050	7.9	285	250	114	