

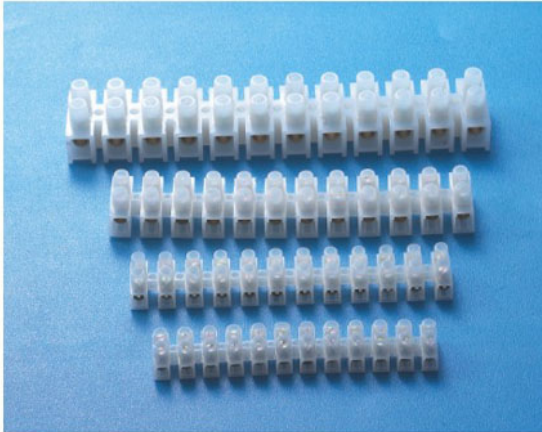


**H TYPE TERMINAL BLOCK (12POLE)**



**Material:** made from PA, PE or PP.  
**Color:** Natural, Black, White



Item No .	Section size (mm <sup>2</sup> )	L (mm)	W (mm)	H	A	B
H-3	3A-2.5/4mm <sup>2</sup>	92	16	12.2	7.1	8.2
H-6	6A-6mm <sup>2</sup>	115	17.7	14.1	7.8	9.2
H-10	10A-10mm <sup>2</sup>	124.6	20.6	16.8	8.7	11.1
H-15	15A-12mm <sup>2</sup>	133.5	22.3	18.6	9.8	12
H-20	20A-14mm <sup>2</sup>	141.6	22.8	18.2	10.1	12.2
H-30	30A-16mm <sup>2</sup>	164.1	24.1	21.8	11.2	15.1
H-60	60A-25mm <sup>2</sup>	190	31	25	13.8	17.2
H-100	100A-35mm <sup>2</sup>	228	38.9	34	17.1	21
H-150	150A-40mm <sup>2</sup>	260	44.1	33.8	23.1	25.2





**H-E TYPE TERMINAL BLOCK (EUROPEAN STANDARD)(12POLE)**

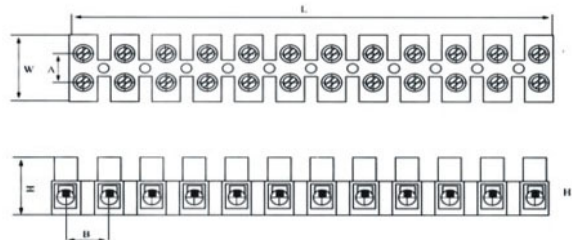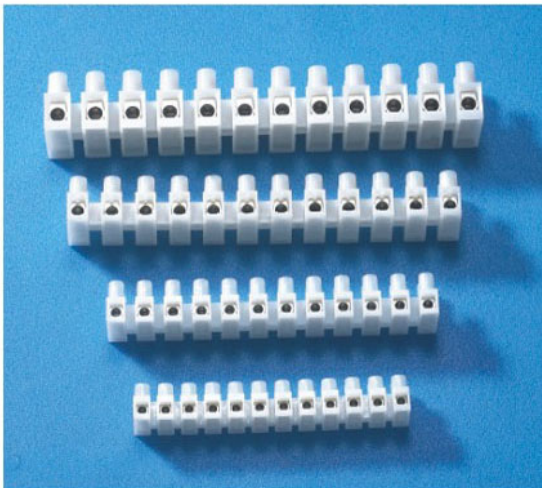


Item No.	Section Size (mm <sup>2</sup> )	L(mm)	W(mm)	H	A	B
H-E8	1.5	96.4	17.2	14.8	7.0	9.8
H-E10	2.5	116.7	20.2	16.9	9.1	11.3
H-E12	6	140.2	24.1	19	10.9	13.5
H-E14	10	158.2	25.9	25	11.5	14.1

**H-N TYPE TERMINAL BLOCK (12POLE)**

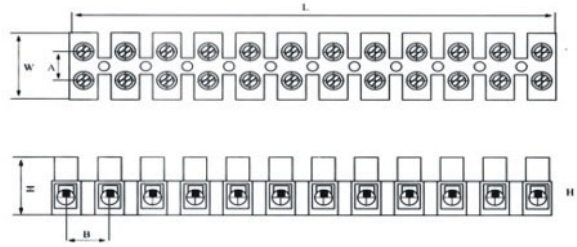
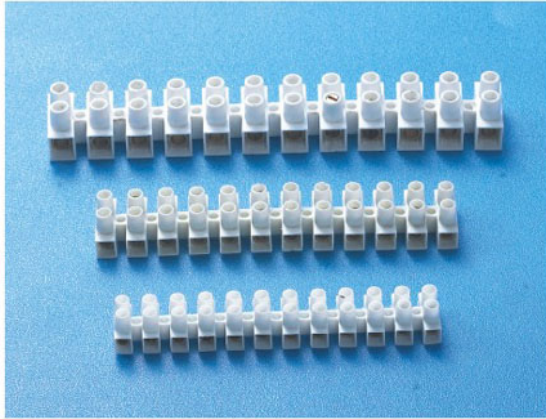


Item No.	L(mm)	W(mm)	H	A	B
6mm <sup>2</sup>	117	19	15	7.5	10.8
10mm <sup>2</sup>	133	23.3	16.8	10	12
16mm <sup>2</sup>	173.5	26	26	11	15

**F(V) TYPE TERMINAL BLOCK (12POLE)**

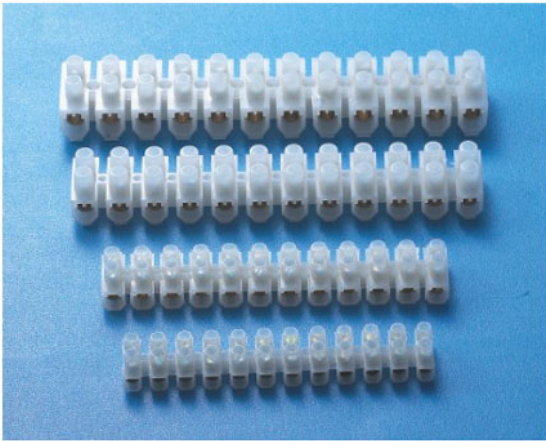

Item No.	Section size (mm <sup>2</sup> )	L(mm)	W(mm)	H	A	B
F-3	3A-2.5/4mm <sup>2</sup>	93	16	12.3	7.2	8.3
F-5	5A-6mm <sup>2</sup>	109.5	17	13.8	7.3	8.8
F-10	10A-10mm <sup>2</sup>	127	21.9	16	9.7	12.1
F-15	15A-12mm <sup>2</sup>	135.1	23.1	17.2	10.1	12
F-30	30A-16mm <sup>2</sup>	156	26	20.2	10.6	14.3
F-60	60A-25mm <sup>2</sup>	187	30	26	14.6	17.6
F-80	80A-30mm <sup>2</sup>	203	36	29.8	16.2	18.8





**W(U) TYPE TERMINAL BLOCK (12POLE)**


**Material:** made from PA, PE or PP.  
**Color:** Natural, Black, White



Item No.	Section size (mm <sup>2</sup> )	L(mm)	W(mm)	H	A	B
W-3	3A-2.5/4mm <sup>2</sup>	92.7	13.5	12.2	6	8.2
W-6	6A-6mm <sup>2</sup>	103.5	18.9	14.5	8.1	10.1
W-10	10A-10mm <sup>2</sup>	127.5	19.7	15.8	8.8	11.9
W-20	20A-14mm <sup>2</sup>	143.7	22.7	17.6	9.8	14.7
W-30	30A-16mm <sup>2</sup>	162	25	19.1	10.9	15.5
W-60	60A-25mm <sup>2</sup>	187	30	26	14.6	17.6
W-80	80A-30mm <sup>2</sup>	208	36.1	29.2	12.2	19.7



**LC Type Terminal Block**

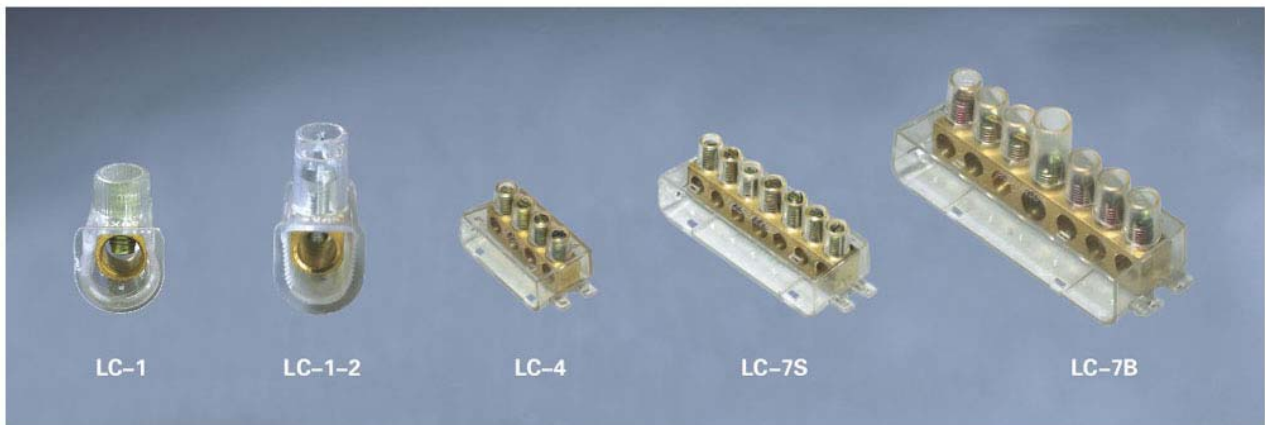

LC-1


LC-1-2

LC-4

LC-7S


LC-7B

**LCT Terminal block(10 Pole)**

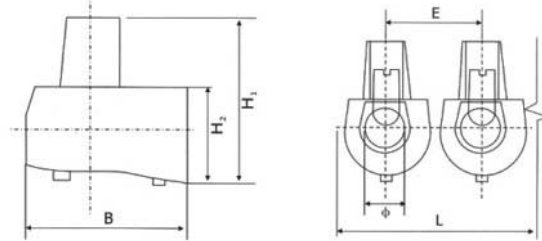


Item No.	Section size (mm <sup>2</sup> )	L(mm)	B	H <sub>1</sub>	H <sub>2</sub>	E <sub>1</sub>	φ
LCT1	1.5	90	15.1	15.1	8.6	5.2	4.1
LCT2	2.5	105.8	17.5	17.4	10.0	6.8	5.3
LCT4	4	110.1	17.7	17.8	10.7	8.3	6.4
LCT6	6	137.1	22.8	23	12.7	10.2	8.1
LCT10	10	165.3	26.5	27.9	15.4	14.3	9.3
LCT16	16	214.2	31.1	32.1	17.3	17.4	14.1



**4POLE MALE & FEMALE TERMINAL BLOCK**

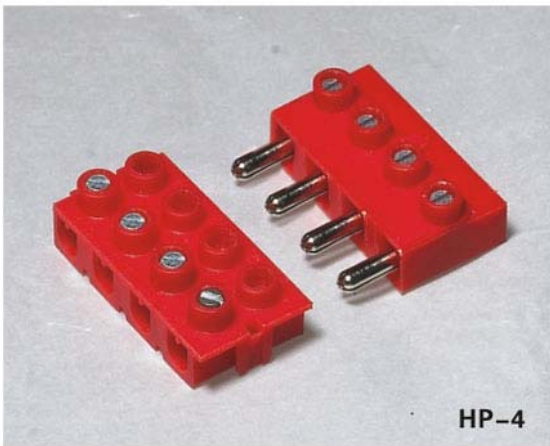

- Screw fixing
- PA body,Copper terminals

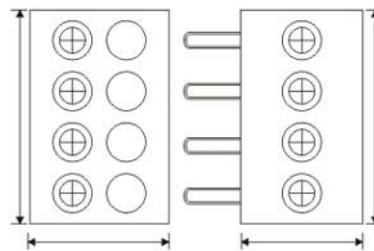


**8T TYPE TERMINAL BLOCK (8POLE)**

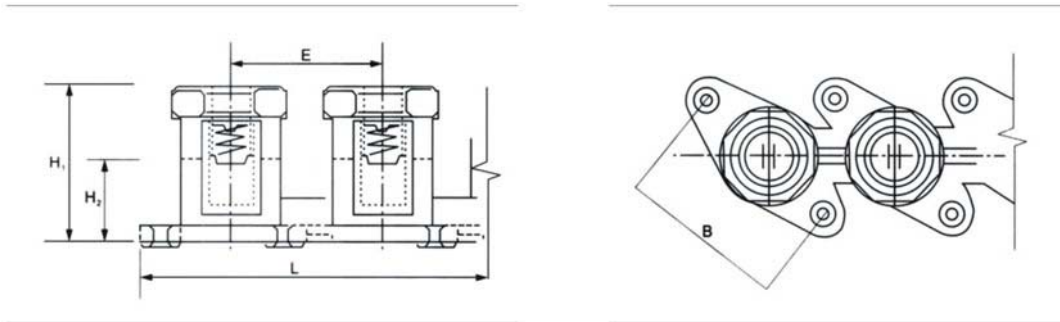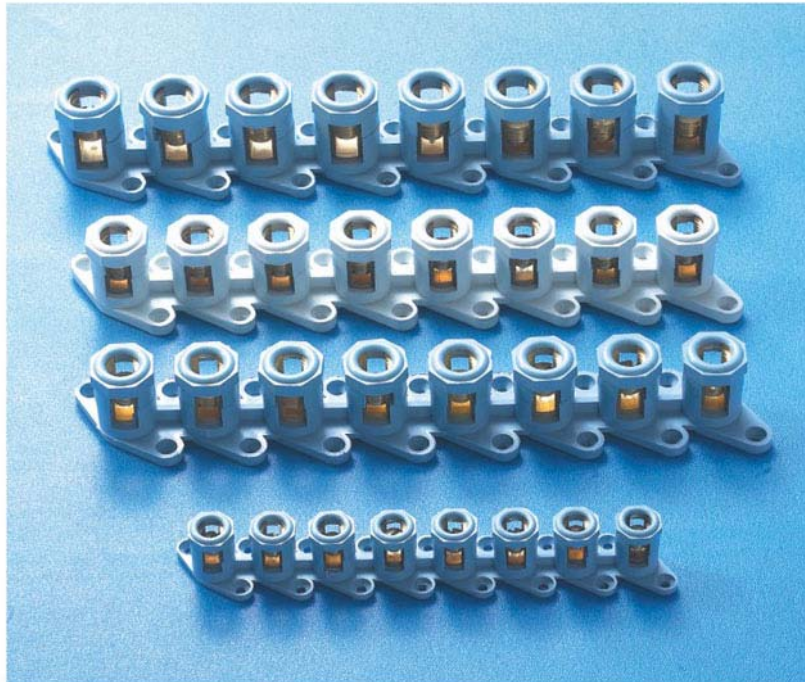

Item No.	Section size (mm)	L(mm)	B	H1	H2	E1	φ
8T16	16	175	27	24	12	22	5
8T25	25	205	31	27	13.5	25	6
8T35	35	250	41.5	33	17	30	8
8T50	50	260	41.5	33	17	32	9
8T70	70	274	42	38	22	33	10


INSULATING MATERIAL: PA  
COLOR: COLORS AVAILABLE UPON REQUEST

**TB SERIES TERMINAL CONNECTOR**

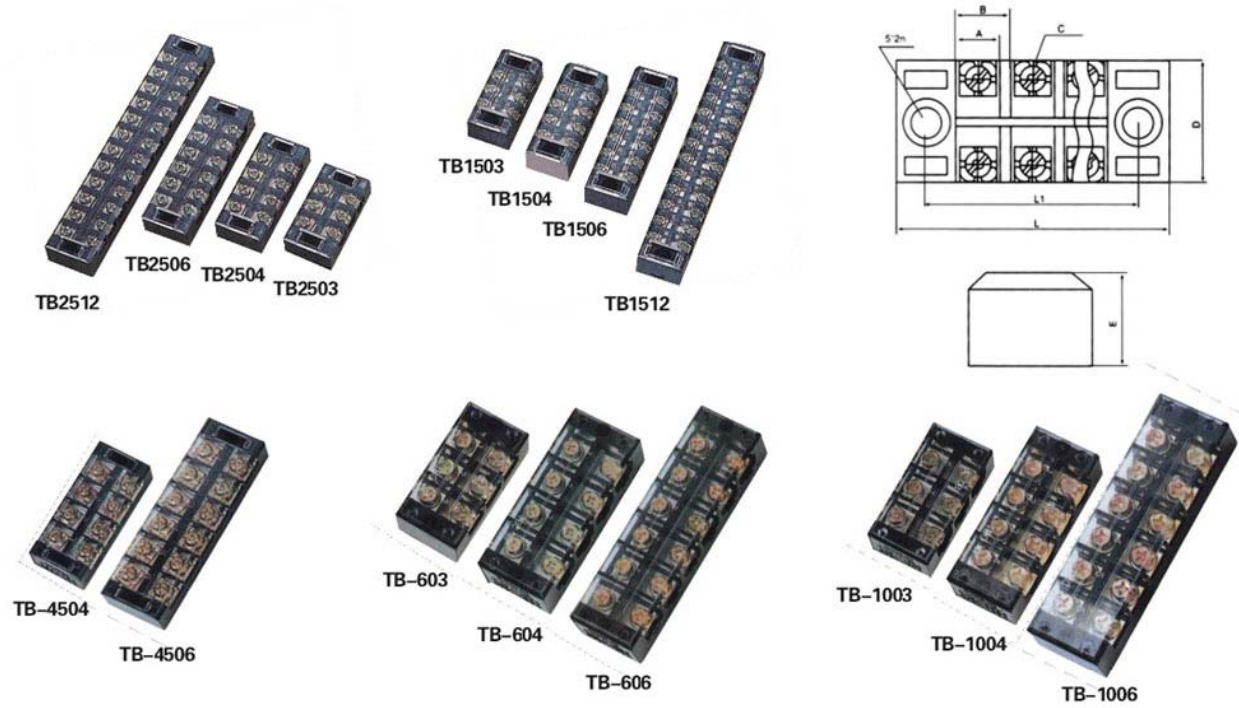


Item No.	Rating	Number Of Poles	Dimension(mm)						
			L	L1	A	B	C	D	E
TB-1503	600V 15A	3	46	36.5	7.5	9	M3	22	17
TB-1504		4	55	45.5	7.5	9	M3	22	17
TB-1506		6	73	63.5	7.5	9	M3	22	17
TB-1512		12	127	118	7.5	9	M3	22	17
TB-2503	600V 25A	3	50	40	10.5	12	M4	30	20
TB-2504		4	62.5	57	10.5	12	M4	30	20
TB-2506		6	91	81.5	10.5	12	M4	30	20
TB-2512		12	163	153	10.5	12	M4	30	20
TB-3503	600V 35A	3	50	40	10.5	12	M4	22	20
TB-3504		4	62.5	57	10.5	12	M4	30	20
TB-3506		6	91	81.5	10.5	12	M4	30	20
TB-3512		12	163	153	10.5	12	M4	30	20
TB-4503	600V 45A	3	70	60.5	15	17	M5	38	23.5
TB-4504		4	86	75.5	15	17	M5	38	23.5
TB-4506		6	120.5	110	15	17	M5	38	23.5
TB-603	600V 60A	3	70.5	65.5	15.5	18	M6	38	31
TB-604		4	93.5	82.5	15.5	18	M6	38	31
TB-606		6	129	118	15.5	18	M6	38	31
TB-1003	600V 100A	3	86.5	75.5	22	20	M6	43.5	35
TB-1004		4	108	96	22	20	M6	43.5	35
TB-1006		6	153	140	22	20	M6	43.5	35

**TC SERIES TERMINAL CONNECTOR**

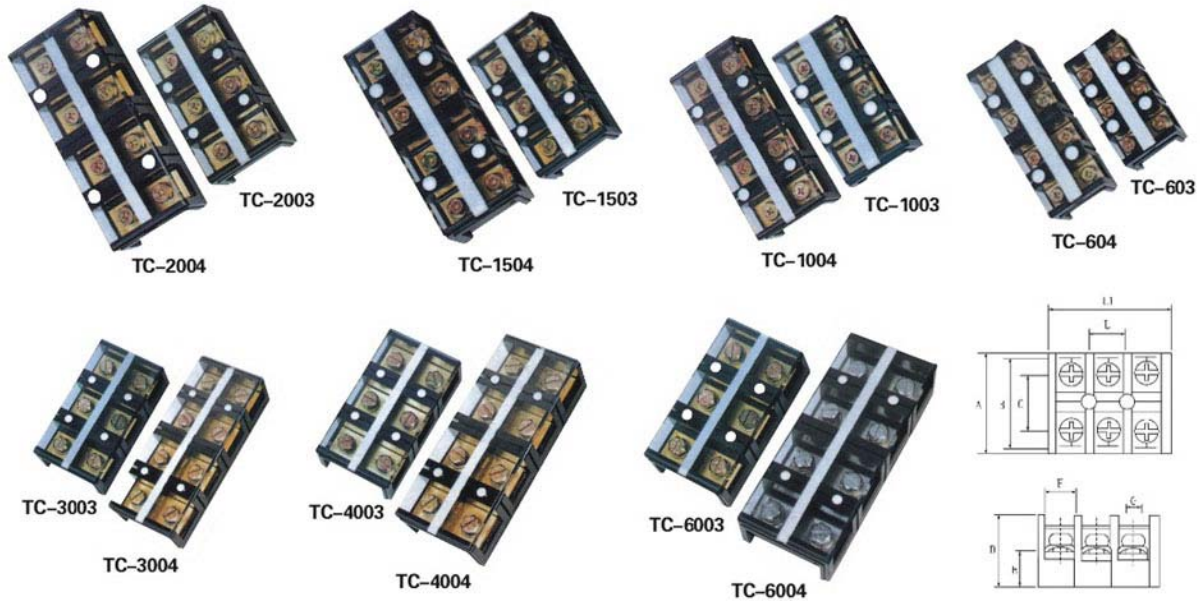


Item No.	Rating	Number Of Poles	Dimension(mm)								
			L	L1	A	B	C	D	E	F	G
TC-603	600V 60A	3	28.5	86.5	42.7	38	25.5	31	17	17	M6
TC--604		4	28.5	115	42.7	38	25.5	31	17	17	M6
TC-1003	600V 100A	3	34.5	113.5	55.2	46.5	28	36.3	17.3	22.5	M6
TC-1004		4	34.5	137.5	55.2	46.5	28	36.3	17.3	22.5	M6
TC-1503	600V 150A	3	38.5	115	67	57.2	30.5	40	19.8	25.3	M8
TC-1504		4	38.5	153	67	57.2	30.5	40	19.8	25.3	M8
TC-2003	600V 200A	3	44.5	133	72.1	63	34	44.4	23	28.3	M8
TC-2004		4	44.5	177	72.1	63	34	44.4	23	28.3	M8
TC-3003	600V 300A	3	55	164	89.4	78	50.6	50.6	27	30	M10
TC-3004		4	55	218	89.4	78	50.6	50.6	27	30	M10
TC-4003	600V 400A	3	55	164	89.4	78	50.6	50.6	27	36	M10
TC-4004		4	55	218	89.4	78	50.6	50.6	27	36	M10
TC-6003	600V 600A	3									
TC-6004		4									

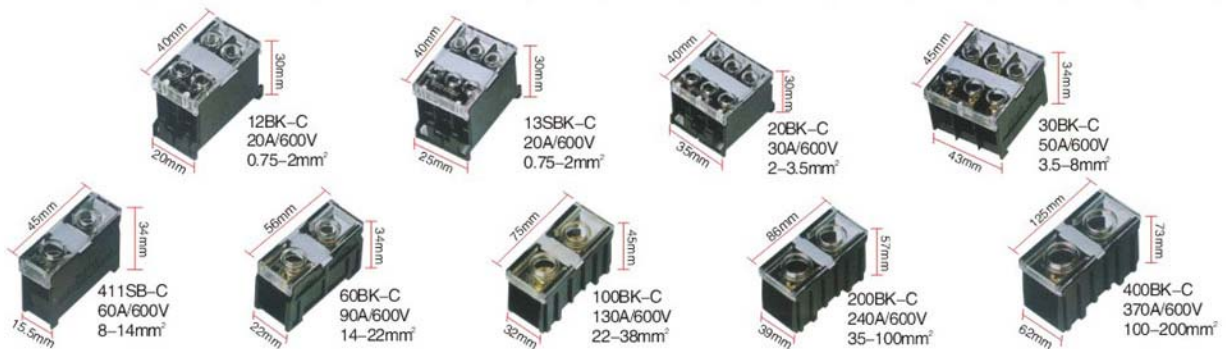


## UK Series Terminal Block




UK3N




UK5N




UK6N




UK10N




USLKG3



USLKG5



USLKG10N



USLKG16N

### Specification:

Connector	Hard wire(mm <sup>2</sup> )	Soft wire(mm <sup>2</sup> )	Rated Current	Rated Voltage	Dimensions(mm)
UK2.5B	0.2-4	0.2-2.5	32A	690VAC	6.2x42.5x42
UK3N	0.2-4	0.2-2.5	32A	800VAC	6.2x42.5x42
UK5N	0.2-6	0.2-4	41A	800VAC	6.2x42.5x42
UK6N	0.2-10	0.2-2.5	57A	800VAC	6.2x42.5x47
UK10N	0.5-16	0.5-10	76A	800VAC	10.2x42.5x47
UK16N	2.5-25	4-16	101A	800VAC	12.2x42.5x54
UK35N	0.75-50	0.75-35	150A	1000VAC	15.2x50.0x62
UKH50	16-50	25-50	150A	1000VAC	20x70.5x83.5
UKH95	25-95	35-95	232A	1000VAC	25x83x97.5
UKH150	35-150	50-150	309A	1000VAC	31x100x118.5

Connector	Hard wire(mm <sup>2</sup> )	Soft wire(mm <sup>2</sup> )	Rated Current	Dimensions(mm)
USLKG2.5	0.2-4	0.2-2.5	32A	6.2 × 42.5 × 42
USLKG3	0.2-4	0.2-2.5	32A	5.2 × 42.5 × 47
USLKG5	0.2-6	0.2-4	41A	6.2 × 42.5 × 47
USLKG6N	0.2-10	0.2-6	57A	8.2 × 42.5 × 47
USLKG10N	0.5-16	0.5-10	76A	10.2 × 42.5 × 47
USLKG16N	2.5-25	4-16	101A	12.2 × 42.5 × 54
USLKG35N	0.75-50	0.75-35	150A	15.2 × 50.0 × 62



## JXB Terminal Block



JBX-2.5/35



JBX-4/35



JBX-10/35



JBX-16/35



JBX-35/35



JBX



JB-4/35



JB-6/35



JB-10/35



JB-16/35  
JB-35/35

### Specification:

Terminal connector	JXB-2.5/35	JXB-4/35	JXB-6/35	JXB-10/35	JXB-16/35	JXB-35/35	JXB-70/35	JXB-100/35
Earth connector	JB-2.5/35	JB-4/35	JB-6/35	JB-10/35	JB-16/35	JB-35/35		

## GCT Terminal blocks



For asymmetrical rail EN 50035    symmetrical rail 15mm depth and rail EN 50022  
7.5mm and 15mm depth  
Insulating material: polyamide-30 to +100°C  
Conform to IEC 60947-7-1



Normal Capacity	Capacity(mm <sup>2</sup> ) Rigid cable	Flexible Cable	Pitch (mm)
25	0.25 to 4	0.25 to 2.5	5
4	0.25 to 6	0.25 to 4	6
6	0.5 to 10	0.25 to 6	8
10	1.5 to 16	2.5 to 10	10
16	1.5 to 25	4 to 16	12
35	2.5 to 50	4 to 35	15
70	25 to 95	16 to 70	22